


Water Pipe



Application: Connection for fluid or gas in medical, food, chemical, and other fields.
 Quality: Approved by ASTM B88-89. Strictly controlled according to standard.
 Composition: C12200, Cu≥99.96%, P: 0.015%-0.040%
 Temper: Hard
 Packing: Capped/Plugged

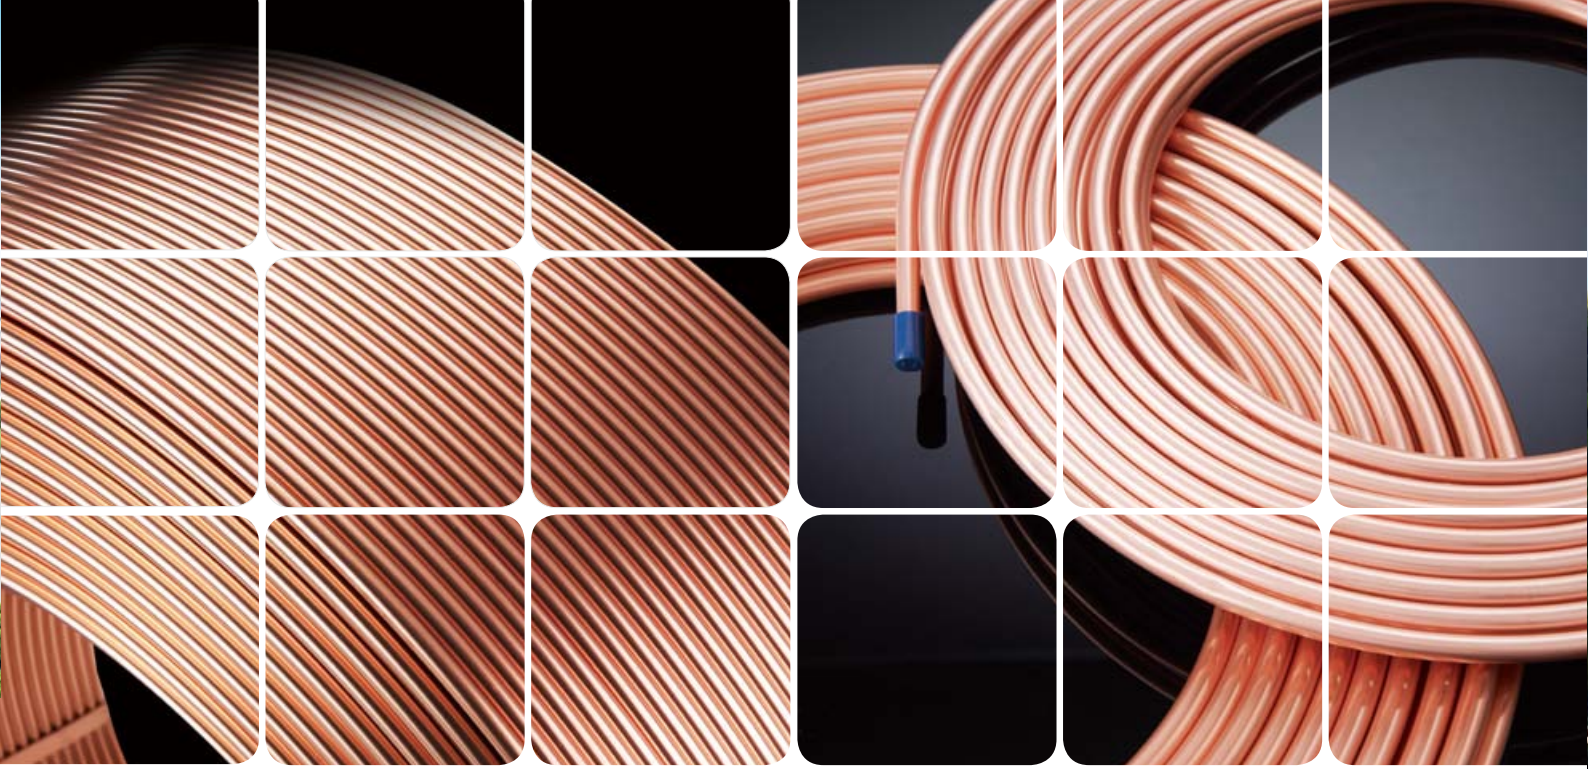

TOP COPPER PROCESSING MANUFACTURER
 —Jintian always offers the best




Company Profile

Ningbo Jintian Copper Tube Co., Ltd (established in 1986) is the top copper processing manufacturer in China, owned by Jintian Group, with over 5500 stuff, annual production capacity of 10 million tons, and yearly turnover of 10 billion USD.

For more than 31 years, Jintian commits itself to serving global market with best-quality products, aiming at bringing continuous improvement to HVACR industry and people's living condition around the world.

Main Products

Main products: inner-grooved tube, level-wound coil, soft annealed pancake coil, straight pipe, and other HVACR spare parts.

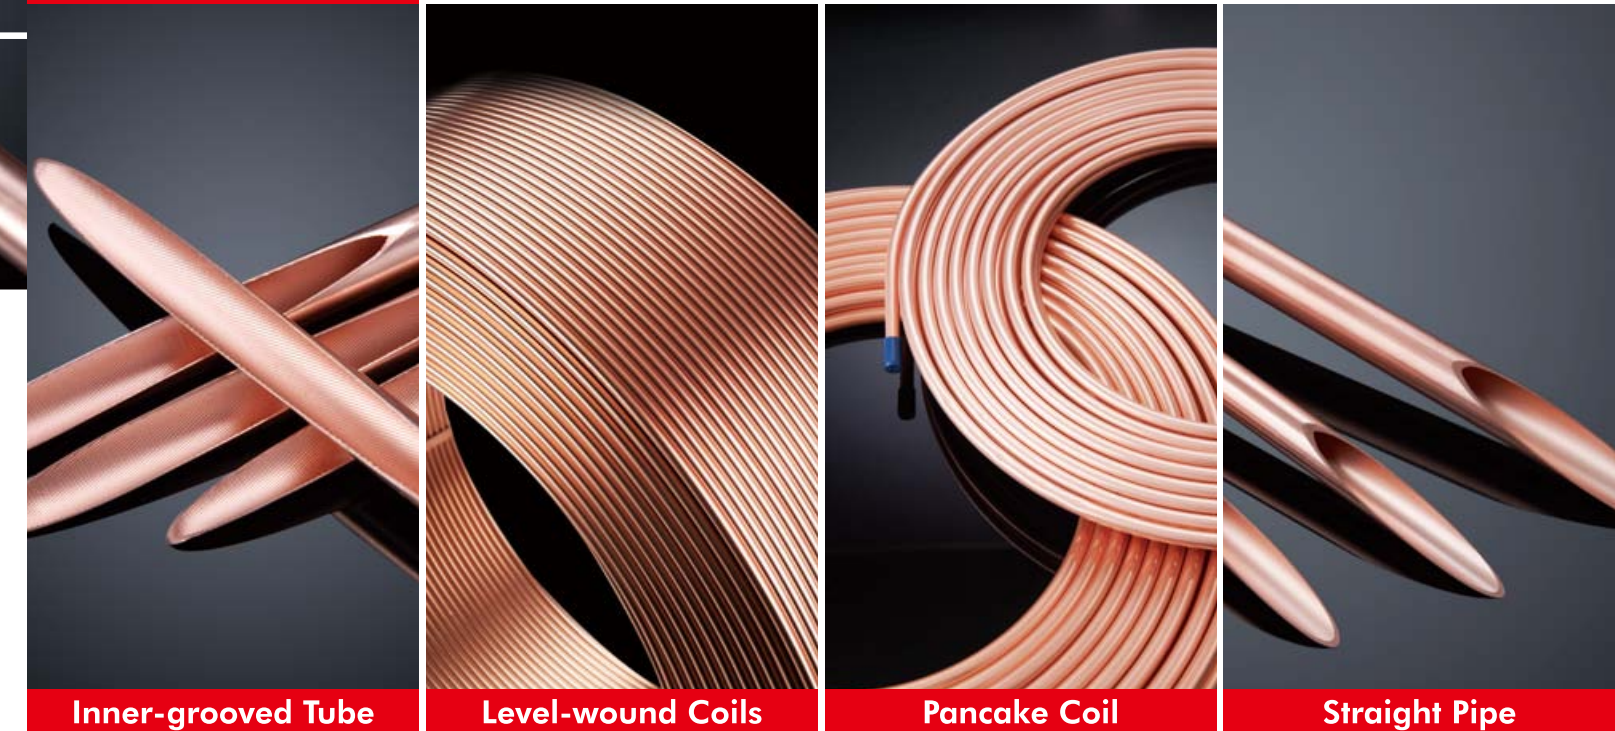

Inner-grooved Tube

Level-wound Coils

Pancake Coil

Straight Pipe

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68
 AS/NZS 1571:1995, AS1432, EN1057

NINGBO JINTIAN
 TOP COPPER PROCESSING
 MANUFACTURER

Top Copper Processing Manufacturer
 -Jintian always offers the best.

- 5500 STUFF
- 10 BILLION USD ANNUAL TURNOVER
- OVER 31-YEAR EXPERIENCE
- 10 MILLION TONS ANNUAL PRODUCTION CAPACITY



Ningbo Jintian Copper Tube Co., Ltd
 Add.: No.1 Chengxi West Road, Cicheng, Ningbo, China
 Tel: 0086-574-87567880
 Fax: 0086-574-87597573
 Email: sales@jt-tube.com



JINTIAN
 NINGBO JINTIAN COPPER TUBE CO.,LTD.

JINTIAN COPPER PIPE

ASTM B88-89 HARD TEMPER PIPE

Actual OD	Actual OD	Length	Actual Wall Thickness			Unit Weight		
			K	L	M	K	L	M
Inch	mm	m	mm			kg/pc		
3/8"	9.53	5.80	0.89	0.76	/	1.25	1.08	/
1/2"	12.70	5.80	1.24	0.89	0.64	2.32	1.71	1.24
5/8"	15.88	5.80	1.24	1.02	0.71	2.96	2.45	1.75
3/4"	19.05	5.80	1.24	1.07	/	3.60	3.12	/
7/8"	22.23	5.80	1.65	1.14	0.81	5.52	3.91	2.83
1-1/8"	28.58	5.80	1.65	1.27	0.89	7.22	5.63	4.00
1-3/8"	34.93	5.80	1.65	1.40	1.07	8.92	7.61	5.87
1-5/8"	41.28	5.80	1.83	1.52	1.24	11.72	9.84	8.09
2-1/8"	53.98	5.80	2.11	1.78	1.47	17.76	15.07	12.56
2-5/8"	66.68	5.80	2.41	2.03	1.65	25.18	21.33	17.43
3-1/8"	79.38	5.80	2.77	2.29	1.83	34.44	28.62	23.03
3-5/8"	92.08	5.80	3.05	2.54	2.11	44.07	36.93	30.80
4-1/8"	104.78	5.80	3.40	2.90	2.41	56.03	47.91	40.11


Above pipes of 5.8 meter length is suitable for 20/40 feet container.

Actual OD	Actual OD	Length	Actual Wall Thickness			Unit Weight		
			K	L	M	K	L	M
Inch	mm	m	mm			kg/pc		
3/8"	9.53	6.096	0.89	0.76	/	1.31	1.14	/
1/2"	12.70	6.096	1.24	0.89	0.64	2.43	1.79	1.31
5/8"	15.88	6.096	1.24	1.02	0.71	3.11	2.58	1.84
3/4"	19.05	6.096	1.24	1.07	/	3.78	3.27	/
7/8"	22.23	6.096	1.65	1.14	0.81	5.80	4.11	2.97
1-1/8"	28.58	6.096	1.65	1.27	0.89	7.59	5.92	4.20
1-3/8"	34.93	6.096	1.65	1.40	1.07	9.38	7.99	6.17
1-5/8"	41.28	6.096	1.83	1.52	1.24	12.31	10.34	8.50
2-1/8"	53.98	6.096	2.11	1.78	1.47	18.66	15.84	13.20
2-5/8"	66.68	6.096	2.41	2.03	1.65	26.47	22.42	18.32
3-1/8"	79.38	6.096	2.77	2.29	1.83	36.20	30.08	24.21
3-5/8"	92.08	6.096	3.05	2.54	2.11	46.32	38.82	32.37
4-1/8"	104.78	6.096	3.40	2.90	2.41	58.89	50.35	42.16

Above pipes of 6.096 meter length is suitable for 40 feet container.

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68
 AS/NZS 1571:1995, AS1432, EN1057

Pancake Coil

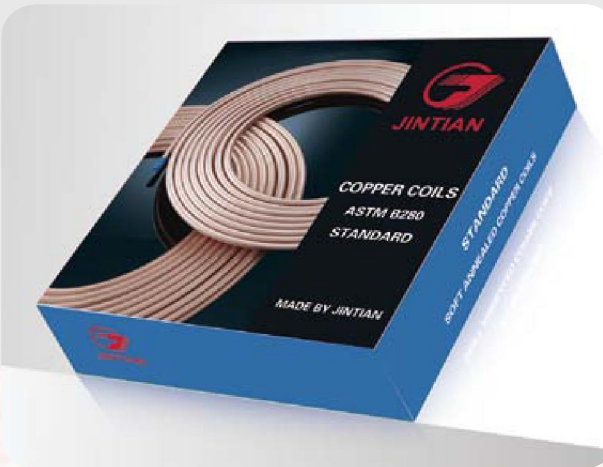

JINTIAN STANDARD

ASTM B280 SOFT ANNEALED COIL

Specification				Unit Weight kg/pc	Coils Per Carton	Working Pressure Mpa	Working Pressure Psi
Inch		mm					
OD	WT	OD	WT				
1/8	0.030	3.18	0.76	0.78	15	24.48	3549
3/16	0.030	4.76	0.76	1.30	15	15.11	2192
1/4	0.030	6.35	0.76	1.82	10	10.94	1586
5/16	0.032	7.94	0.81	2.47	10	9.19	1333
3/8	0.032	9.53	0.81	3.02	10	7.55	1094
1/2	0.032	12.70	0.81	4.12	5	5.56	806
5/8	0.035	15.88	0.89	5.69	5	4.83	700
3/4	0.035	19.05	0.89	6.89	4	3.99	579
7/8	0.045	22.23	1.14	10.26	4	4.41	639
1-1/8	0.050	28.58	1.27	14.80	3	3.80	551

Above specs. recommended - Length available in 50 feet, 15.24 meter
Other sizes can be customized

Application: Connection for piping system and ACR units.
Quality: Suitable for all refrigerants.
Composition: C12200, Cu≥99.96%, P: 0.015%-0.040%
Temper: Soft annealed
Packing: End capped; double layer; shrink wrapped. Packed in cartons with black and blue printing.

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68 AS/NZS 1571:1995, AS1432, EN1057

Pancake Coil



JINTIAN ECONOMICAL

SOFT ANNEALED COIL

Specification				Unit Weight per Coil kg/pc	Coils per Carton	Working Pressure Mpa	Working Pressure Psi
Inch		mm					
OD	WT	OD	WT				
3/16	0.024	4.76	0.61	1.08	15	11.75	1703
1/4	0.024	6.35	0.61	1.49	10	8.57	1242
5/16	0.024	7.94	0.61	1.91	10	6.74	978
3/8	0.024	9.53	0.61	2.32	10	5.56	806
1/2	0.028	12.70	0.71	3.64	5	4.83	700
5/8	0.028	15.88	0.71	4.60	5	3.83	555
3/4	0.032	19.05	0.81	6.33	4	3.64	528
7/8	0.040	22.23	1.02	9.20	4	3.91	567

Above specs. recommended - Length available in 50 feet, 15.24 meter
Other sizes can be customized

Application: Connection for piping system and ACR units.
Quality: Suitable for all refrigerants.
Composition: C12200, Cu≥99.96%, P: 0.015%-0.040%
Temper: Soft annealed
Packing: End capped; double layer; shrink wrapped. Packed in cartons with white printing.

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68 AS/NZS 1571:1995, AS1432, EN1057

Straight Pipe



Application: Connection for piping system and ACR units.
Quality: Suitable for all refrigerants.
Composition: C12200, Cu≥99.96%, P: 0.015%-0.040%
Temper: Hard
Packing: Capped/plugged

JINTIAN STANDARD

ASTM B280 HARD TEMPER PIPE

Specification					Unit Weight kg/pc	Qty per Ton pcs	Qty per Bundle pcs
Inches	OD	WT	mm	m			
				Length			
3/8"	0.030	9.53	0.76	5.8	1.08	922	30
1/2"	0.035	12.70	0.89	5.8	1.71	586	20
5/8"	0.040	15.88	1.02	5.8	2.45	408	20
3/4"	0.042	19.05	1.07	5.8	3.12	321	15
7/8"	0.045	22.23	1.14	5.8	3.91	256	10
1-1/8"	0.050	28.58	1.27	5.8	5.63	178	8
1-3/8"	0.055	34.93	1.40	5.8	7.61	131	5
1-5/8"	0.060	41.28	1.52	5.8	9.84	102	3
2-1/8"	0.070	53.98	1.78	5.8	15.07	66	2
2-5/8"	0.080	66.68	2.03	5.8	21.33	47	1
3-1/8"	0.090	79.38	2.29	5.8	28.62	35	1
3-5/8"	0.100	92.08	2.54	5.8	36.93	27	1
4-1/8"	0.110	104.78	2.79	5.8	46.27	22	1

Above pipes of 5.8 meter length is suitable for 20/40 feet container.

3/8"	0.030	9.53	0.76	6.096	1.14	877	30
1/2"	0.035	12.70	0.89	6.096	1.79	558	20
5/8"	0.040	15.88	1.02	6.096	2.58	388	20
3/4"	0.042	19.05	1.07	6.096	3.27	305	15
7/8"	0.045	22.23	1.14	6.096	4.11	243	10
1-1/8"	0.050	28.58	1.27	6.096	5.92	169	8
1-3/8"	0.055	34.93	1.40	6.096	7.99	125	5
1-5/8"	0.060	41.28	1.52	6.096	10.34	97	3
2-1/8"	0.070	53.98	1.78	6.096	15.84	63	2
2-5/8"	0.080	66.68	2.03	6.096	22.42	45	1
3-1/8"	0.090	79.38	2.29	6.096	30.08	33	1
3-5/8"	0.100	92.08	2.54	6.096	38.82	26	1
4-1/8"	0.110	104.78	2.79	6.096	48.63	21	1

Above pipes of 6.096 meter length is suitable for 40 feet container.

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68 AS/NZS 1571:1995, AS1432, EN1057

Straight Pipe



Application: Connection for piping system and ACR units.
Quality: Suitable for all refrigerants.
Composition: C12200, Cu≥99.96%, P: 0.015%-0.040%
Temper: Hard
Packing: Capped/plugged

JINTIAN ECONOMICAL

HARD TEMPER PIPE

Specification					Unit Weight kg/pc	Qty per Ton pcs	Qty per Bundle pcs
Inch	OD	WT	mm	m			
				Length			
3/8"	0.024	9.53	0.61	5.8	0.88	1133	30
1/2"	0.024	12.70	0.61	5.8	1.20	835	20
5/8"	0.028	15.88	0.71	5.8	1.75	571	20
3/4"	0.028	19.05	0.71	5.8	2.12	472	15
7/8"	0.032	22.23	0.81	5.8	2.83	354	10
1-1/8"	0.036	28.58	0.91	5.8	4.11	243	8
1-3/8"	0.040	34.93	1.02	5.8	5.59	179	5
1-5/8"	0.048	41.28	1.22	5.8	7.93	126	3
2-1/8"	0.056	53.98	1.42	5.8	12.14	82	2
2-5/8"	0.064	66.68	1.63	5.8	17.17	58	1
3-1/8"	0.070	79.38	1.78	5.8	22.41	45	1
3-5/8"	0.080	92.08	2.03	5.8	29.71	34	1
4-1/8"	0.095	104.78	2.41	5.8	40.11	25	1

Above pipes of 5.8 meter length is suitable for 20/40 feet container.

3/8"	0.024	9.53	0.61	6.096	0.93	1078	30
1/2"	0.024	12.70	0.61	6.096	1.26	795	20
5/8"	0.028	15.88	0.71	6.096	1.84	543	10
3/4"	0.028	19.05	0.71	6.096	2.23	449	15
7/8"	0.032	22.23	0.81	6.096	2.97	337	10
1-1/8"	0.036	28.58	0.91	6.096	4.32	232	8
1-3/8"	0.040	34.93	1.02	6.096	5.88	170	5
1-5/8"	0.048	41.28	1.22	6.096	8.34	120	3
2-1/8"	0.056	53.98	1.42	6.096	12.76	78	2
2-5/8"	0.064	66.68	1.63	6.096	18.05	55	1
3-1/8"	0.070	79.38	1.78	6.096	23.55	42	1
3-5/8"	0.080	92.08	2.03	6.096	31.23	32	1
4-1/8"	0.095	104.78	2.41	6.096	42.16	24	1

Above pipes of 6.096 meter length is suitable for 40 feet container.

Executive Standard: GB/T 17791-2007, ASTM B280, JIS H3300, ASTM B88, ASTM B68 AS/NZS 1571:1995, AS1432, EN1057