




PUXING AOLLY TECHNOLOGY CO.,LTD

Tel: 0319- 8862898

Email: inquiry@puxingclamp.com

|  +86 16630967771

|  www.puxingclamp.com



PUXING AOLLY TECHNOLOGY CO.,LTD



Our company was established in 2009, covering an area of 620,000 square meters , with a construction area of 48,000 square meters, and an annual output of 50,000 tons of cold-rolled stainless steel strips, 2 billion stainless steel clamps, and 7.2 million pairs of steel mid-soles.

It has been rated as national high-tech enterprise,national stainless steel plate and strip R&D center, and Provincial specialized special letter small giant enterprise.



Factory Show



Inspection Capability



American Type Hose Clamp-MINI

Bandwidth:8mm Band thickness:0.6mm
Screw:hex head M6, slotted& plus



Part No.	MG-02	MG-04	MG-05	MG-06	MG-012
Inch	1/2"	5/8"	3/4"	1"	1-1/4"
Size(mm)	8-12	10-16	13-19	16-25	18-32



Large American Type Hose Clamp

Bandwidth:12.7mm&14.2mm
Bandthickness:0.6mm&0.65mm
Screw:hex head M8, slotted& plus



Part No.	AT-08	AT-12	AT-16	AT-20	AT-24	AT-28	AT-32	AT-36	AT-40	AT-44
Inch	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/4"	2-1/2"	2-3/4"	3"	3-1/4"
Size(mm)	16-25	18-32	21-38	21-44	27-51	33-57	40-64	46-70	52-76	59-83



Power-Gear Hose Clamp

Bandwidth:12.7mm&14.2mm
Band thickness:0.6mm&0.65mm
Screw:hex head M8, slotted& plus



Part No.	HT-12	HT-16	HT-20	HT-24	HT-28	HT-32	HT-36	HT-40	HT-44	HT-48
Inch	1-1/4"	1-1/2"	1-3/4"	2"	2-1/4"	2-1/2"	2-3/4"	3"	3-1/4"	3-1/2"
Size(mm)	18-32	21-38	21-44	27-51	33-57	40-64	46-70	52-76	59-83	65-89



Snap Lock Quick Release Hose Clamp

Bandwidth:12.7mm&14.2mm
Band thickness:0.6mm&0.65mm
Screw:hex head M8, slotted& plus



Part No.	OR-012	OR-20	OR-24	OR-28	OR-36	OR-48	OR-56	OR-56	OR-88	OR-104
Inch	1-1/4"	1-3/4"	2"	2-1/2"	2-3/4"	3-1/2"	4"	4"	5-1/2"	5-3/4"
Size(mm)	18-32	21-44	27-51	40-64	46-70	65-89	78-101	78-101	110-140	95-146

Quick Release Hose Clamp

Bandwidth:12mm
Band thickness:1.0mm
Screw:outer hex head & inner hex head



Part No.	OR-01	OR-02	OR-03	OR-04	OR-05	OR-06	OR-07	OR-08	OR-09	OR-010
Size(mm)	40-60	40-80	67-127	75-130	40-180	80-200	50-215	44-217	239-225	239-254

Perforated endless clamp

Bandwidth:8mm&12.7mm
Bandthickness:0.6mm



Germany Type Hose Clamp

Bandwidth:9mm&12mm
Bandthickness:0.6mm&0.7mm
Screw:hex head M7, slotted& plus



Size(mm)	8-12	10-16	12-22	16-25	20-32	25-40	30-45	40-60	50-70	60-80
Size(mm)	70-90	80-100	90-110	100-120	110-130	120-140	130-150	140-160	150-170	160-180



Germany Type Non Perforated Clamp

Bandwidth:9mm&12mm
Bandthickness:0.8mm
Screw:hex head M7, slotted& plus



Size(mm)	8-12	10-16	12-22	16-27	20-32	25-40	30-45	35-50	40-60
Size(mm)	50-70	60-80	70-90	80-100	90-110	100-120	110-130	120-140	130-150



Heavy Duty Hose Clamp

Bandwidth:18mm&20mm&22mm&24mm&26mm
Band thickness:0.6mm &0.8mm&1.0mm
Bolt:M5&M6& M8&M10



Size(mm)	17-19	20-22	23-25	26-28	29-31	32-35	36-39	39-41	40-43	44-47
Size(mm)	48-51	52-55	56-59	60-63	64-67	68-73	74-79	80-85	86-91	92-97



T-Bolt Hose Clamp

It is a high strength, reliable clamp with numerous applications in both the commercial and industrial markets including hose and ductwork connections for air, oil, water, other types of low pressure fluid lines, engine air intake, exhaust, hose and filters



Size(mm)	35-40	38-43	41-46	42-49	47-54	52-60	56-64	59-67	63-71	70-78
Size(mm)	74-83	80-89	86-95	92-101	96-104	109-117	116-124	122-130	129-136	132-140



T-Bolt Spring Loaded Hose Clamp


This clamps design compensates and provides constant tension to prevent leak paths due to temperature fluctuations.



Size(mm)	46-52	49-57	52-60	56-64	59-67	65-73	71-79	76-84	78-86	83-91
Size(mm)	103-111	109-117	116-124	122-130	129-136	132-140	138-146	141-149	147-155	154-162



U shape clamp

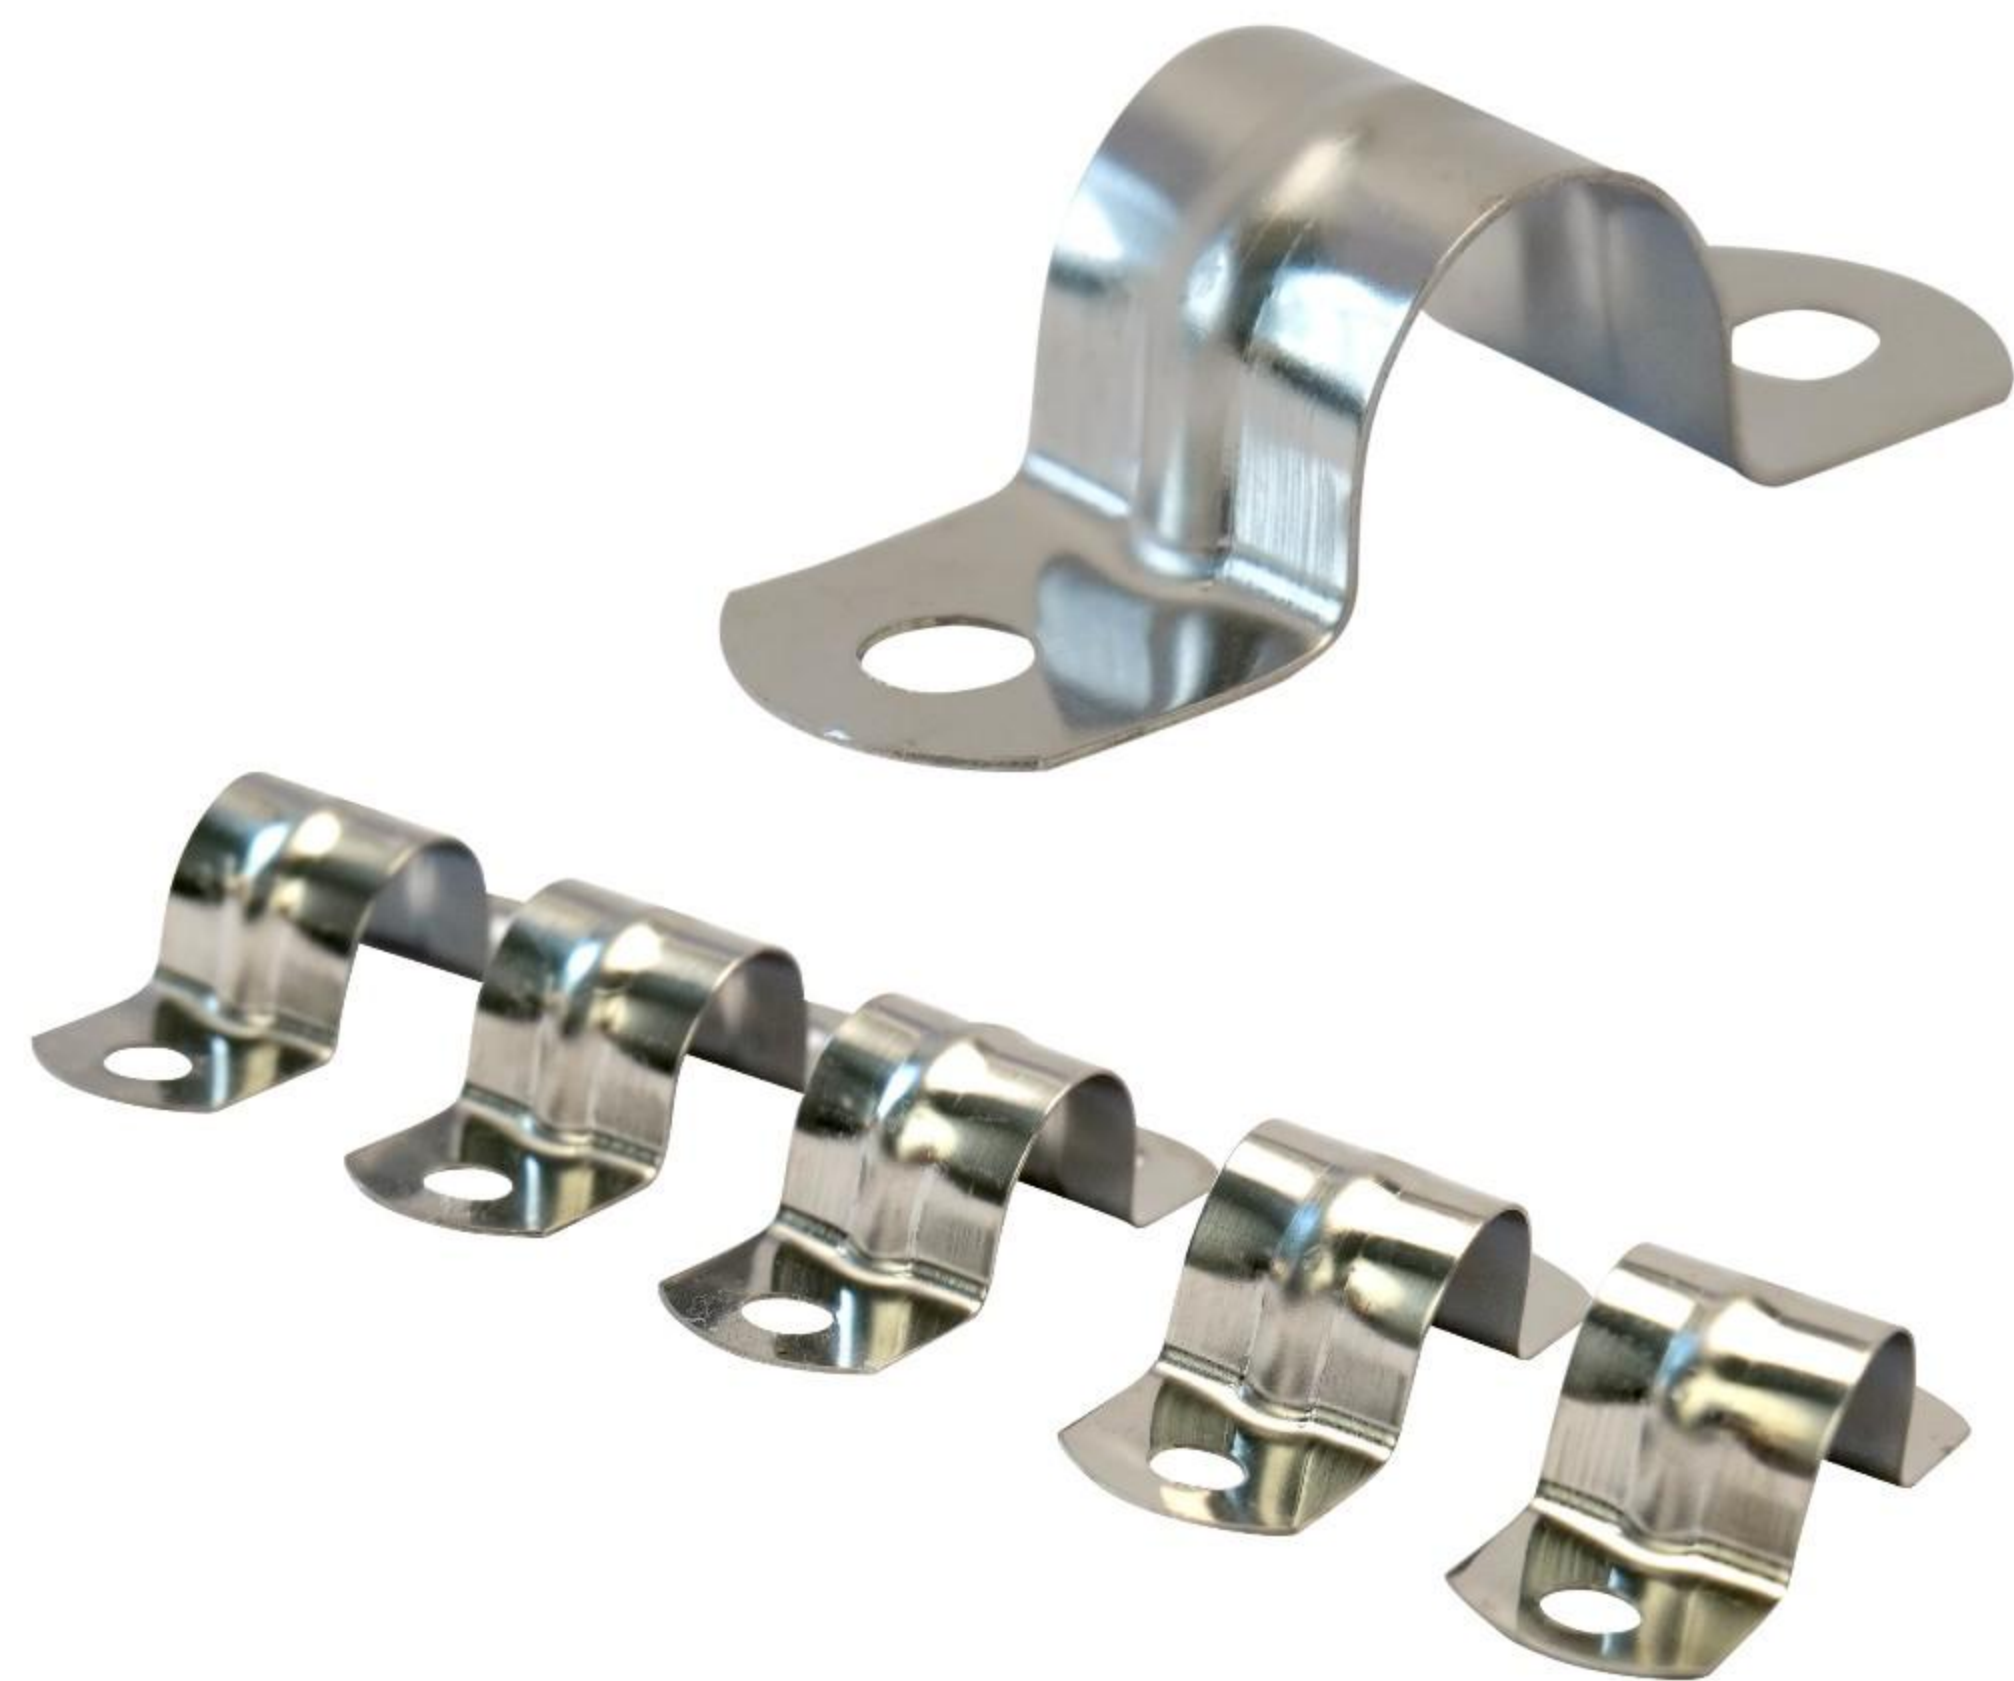

Size(mm)	M5	M8	M10	M12	M14	M16	M18	M20	M22	M25	M27
Inner diameter(mm)	6	9	11	13	15	17	19	21	23	26	28
Height(mm)	5	8	10	12	14	16	18	20	22	25	27



Stainless Steel Coil

Material:201/304/202/316

Thickness:0.1mm-2mm

Width:4mm-650mm

Scope of use :varuous types of stainless steel hose clamp, stainless steel ties ,round tempered glass pot cover lid ,stainless steel steamers, steel midsole, stainless steel corrugated pipes



Steel mid-sole

Material:stainless steel,manganese steel ,iron
Function:anti impact,anti puncture,anti static
Executive standards:EN12568
Puncture resistance:>1100N
Resistance to twists and turns:>1millions



Other Clamp Catagory

